
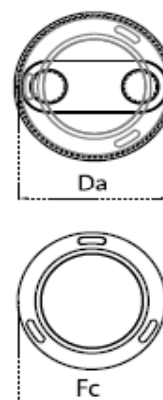


### Vloeistofafscieder

Max. werkdruk is 32 bar

Bedrijfstemperatuur van -40 tot 80 °C

| Artikelnr. | Type      | Aansl. soldeer | Afmetingen in mm |        | Max. cap. in kW (R404A/R507) |        |
|------------|-----------|----------------|------------------|--------|------------------------------|--------|
|            |           |                | Diam.            | Hoogte | -5 °C                        | -30 °C |
| 8510300    | SLA-1/2   | 1/2"           | 114              | 232    | 2,5                          | 0,9    |
| 8510302    | SLA-5/8   | 5/8"           | 114              | 232    | 4,7                          | 1,6    |
| 8510304    | SLA-3/4   | 3/4"           | 114              | 235    | 8,8                          | 2,9    |
| 8510306    | SLA-7/8   | 7/8"           | 140              | 335    | 12,0                         | 6,6    |
| 8510308    | SLA-1.1/8 | 1.1/8"         | 140              | 415    | 21,0                         | 11,2   |
| 8510310    | SLA-1.3/8 | 1.3/8"         | 165              | 472    | 46,0                         | 16,0   |
| 8510312    | SLA-1.5/8 | 1.5/8"         | 165              | 480    | 68,0                         | 23,0   |
| 8510314    | SLA-2.1/8 | 2.1/8"         | 219              | 525    | 132,0                        | 46,0   |
| 8510316    | SLA-2.5/8 | 2.5/8"         | 273              | 555    | 220,0                        | 72,0   |
| 8510318    | SLA-3.1/8 | 3.1/8"         | 324              | 610    | 310,0                        | 105,0  |

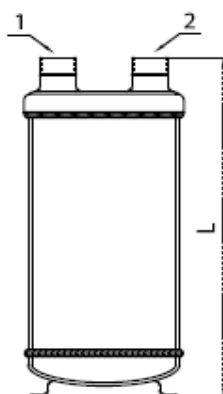

### Pulsatiedempers

Max. werkdruk is 32 bar

Max. bedrijfstemperatuur is 130 °C

| Artikelnr. | Type      | Aansl. soldeer | Afmetingen in mm |        |
|------------|-----------|----------------|------------------|--------|
|            |           |                | Diam.            | Hoogte |
| 8510204    | MF-1/2    | 1/2"           | 76               | 184    |
| 8510206    | MF-5/8    | 5/8"           | 76               | 184    |
| 8510208    | MF-3/4    | 3/4"           | 76               | 190    |
| 8510210    | MF-7/8    | 7/8"           | 76               | 230    |
| 8510212    | MF-1.1/8  | 1.1/8"         | 76               | 230    |
| 8510214    | MF-7/8x   | 7/8"           | 102              | 170    |
| 8510216    | MF-1.1/8x | 1.1/8"         | 102              | 290    |
| 8510218    | MF-1.3/8  | 1.3/8"         | 102              | 324    |
| 8510220    | MF-1.5/8  | 1.5/8"         | 102              | 460    |
| 8510222    | MF-2.1/8  | 2.1/8"         | 140              | 530    |
| 8510224    | MF-2.5/8  | 2.5/8"         | 140              | 560    |

